

Company	Customer No.
Contact person	
Address	
Country	
Phone	Fax
E-Mail	

To:
Walter Sales company

Quantities:

cutting-Ø < 6 3 - 100 pcs., Ø 6 ≤ cutting-Ø < 20 3 - 50 pcs
Ø 20 ≤ cutting-Ø ≤ 25 3 - 30 pcs.

Selection machining type:


Aluminum
Titanium

Coolant supply


external
internal
internal MQL

Face geometry:

sharp corner




Radius at corner



R:

Corner chamfer



l_{11}
α

ballnose




Center cut:

with center cut

without center cut

Construction Dimensions:

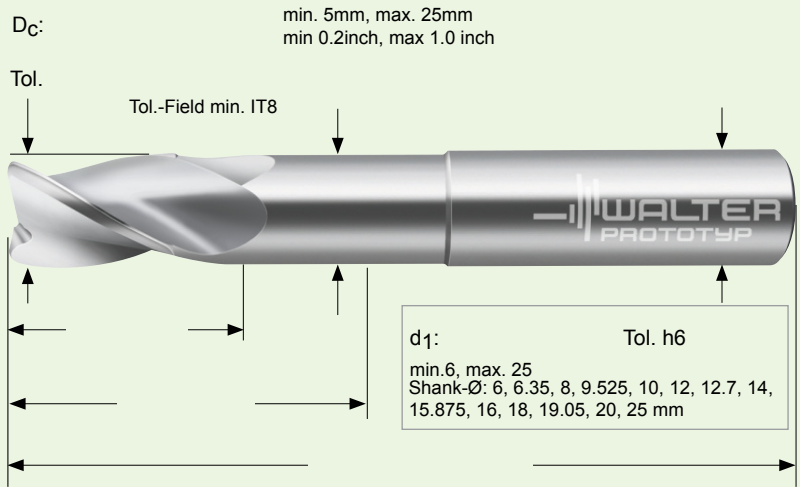

End mill sub group:

- MB265
- MB266
- HPC_AL30
- HPC_AL38
- AL45

Coating:

- UU
- BA
- RD*
- EA
- CA*
- TF*

Type of shank DIN 6535:

- HA
- HE
- HB
- Safelock™

Comments:

Shipment of the tool within 2 weeks from Germany. (* within 3 weeks). Additional information about Walter Xpress you will find at www.walter-tools.com

All green highlighted fields are mandatory fields to design the special tool. The other input fields are optional.